




INSERTS TARAUDES



INSERTS TARAUDES



INSERT HEXAGONAL TETE REDUITE

Type : **IATRH**

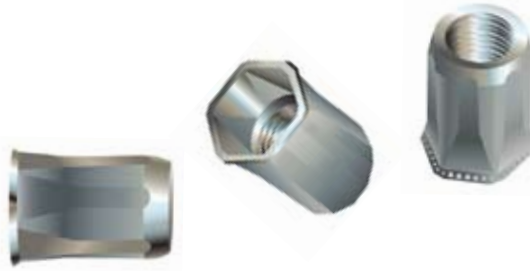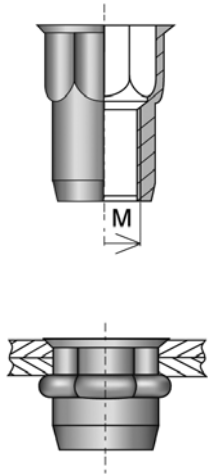

Caractéristiques Techniques

M	Dimensions en mm		
	Epaisseurs à sertir	H poinçonnage hexagonal + 0,1 / - 0	Code
4	0,5 - 2,0	6,4	0520
	0,5 - 3,0	6,0	0530
	0,5 - 2,0		0520
5	0,5 - 3,0	7,3	0530
	0,5 - 3,0	7,0	0503
	0,5 - 2,0		0520
6	0,7 - 3,0	9,7	0730
	0,7 - 3,0	9,7	0730
	0,5 - 3,0		0530
	0,5 - 3,0	9,0	0530
	4,0 - 6,0		4060
8	0,9 - 3,3	10,7	0933
	0,5 - 3,0		0530
	0,7 - 3,0	11,0	0730
10	4,0 - 6,0		4060
	1,0 - 3,5	13	1035
	2,0 - 6,0		2060



► **Matière** : acier zingué

Pour toutes autres dimensions
ou matières,
nous consulter.



**SOUDEGE INSTANTANE ET
FIXATIONS INDUSTRIELLES**

22, rue des Celtes - 68510 SIERENTZ

Tél. 03 89 81 59 51



Fax : 03 89 81 55 07



Courriel : messages@sifi.fr

www.sifi.fr

Sous réserve d'erreurs, d'omissions, de modifications et de transformations.